

The SCL4 earphone features High-Definition drivers with Tuned-Port technology for an ultra-wide frequency soundstage with brilliant highs and extended bass. As the ideal companion to any portable or home audio source, the SCL4 incorporates the same precision components used by professional musicians to bring incredibly accurate sound with remarkable isolation.

©2007, Shure Incorporated
27EN3250(Rev. 1)

Printed in U.S.A.

CHOOSING AN EARPHONE SLEEVE

Your earphones come with a selection of sleeves. Make sure the sleeve you use is easy to insert into your ear, fits comfortably, and is easy to remove from your ear.



Soft Flex Sleeves

In small, medium, and large sizes. Made from pliable rubber.



Yellow and Black Foam Sleeves

When using the foam sleeves, compress the sleeve between your fingers before inserting it into the ear canal. Hold the earphone in place for about ten seconds while the foam expands and creates a tight seal. Black foams come in small, medium and large sizes.




Triple-Flange Sleeves

If desired, the sleeve nozzle may be shortened. Use sharp scissors to carefully trim the nozzle to the desired length.

Note: Carefully slide sleeve over earphone nozzle barb for a secure grip.

WEARING THE EARPHONES


Three popular methods for wearing the earphones are illustrated below.

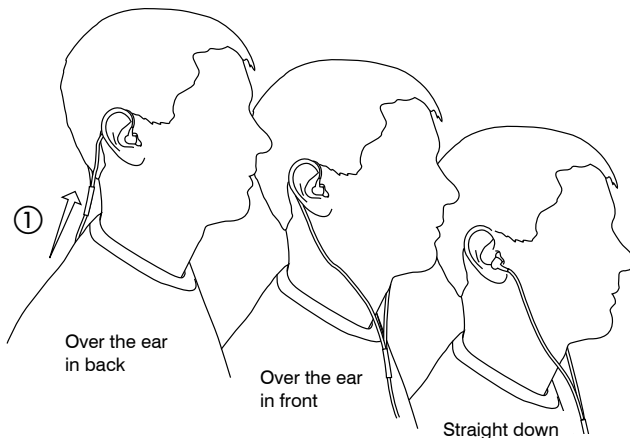

Tighten the cable and take up slack by raising the cable sleeve ①.

CLEANING THE EARPHONE NOZZLE

If the nozzle of your earphone is blocked, clean the nozzle using the supplied wax removal loop.

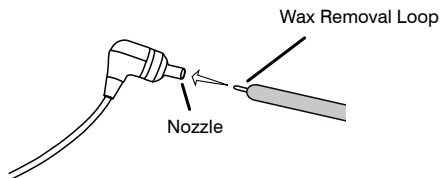

When cleaning, do not force any object through the earphone nozzle! This will damage the earphone sound filter.

If necessary, the supplied replacement nozzles may be used. See the back of this guide for instructions on nozzle replacement.




Warning: The wax removal loop is only to be used to clean earphones. Any other use, such as using the tool to clean ears, could result in injury.

INSERTING THE EARPHONES

If the earphone seems to be lacking in low frequency response (bass), check the tightness of the seal between the earphone and your ear, or try one of the other sleeve options.

Warning: Do not push the earphone sleeve beyond the ear canal opening.

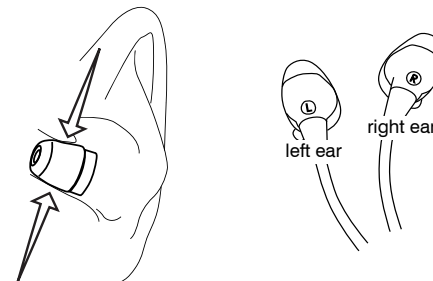

To change earphone sleeve, twist and pull sleeve to remove it from the nozzle. Push new sleeve onto nozzle until you feel it slide completely over barb. If any part of the nozzle is exposed, sleeve is not properly installed. Replace sleeves if they do not grip the nozzle tightly









Nozzle Barb



Sleeve Over Barb

MAINTENANCE


Careful maintenance ensures a tight seal between the sleeve and nozzle, improving sound quality and product safety.

	Keep the earphones and sleeves as clean and dry as possible.
	To clean sleeves , remove them from earphones, gently rinse in warm water and air dry. Foam sleeves require a longer drying time. Inspect for damage and replace if necessary. Ear sleeves must be completely dry before reusing.
	Wipe the earphones and sleeves with mild antiseptic to avoid infections. Do not use alcohol-based disinfectants.
	Do not expose earphones to extreme temperatures.
	Replace the sleeves if they do not fit properly.
	Do not attempt to modify this product. Doing so will void the warranty and could result in personal injury and/or product failure.

CUSTOM EARPHONE SLEEVES

Those who use earphones regularly for extended periods of time often find custom-fit molded sleeves offer the best comfort and sound isolation.

Ask a Hearing Health Care Professional about creating custom molded sleeves for your earphones. For more information, contact:



Sensaphonics Hearing Conservation Toll Free: (877) 848-1714
660 N. Milwaukee Avenue In Chicago: (312) 432-1714
Chicago, IL 60622

e-mail: saveyourears@sensaphonics.com
www.sensaphonics.com

FURNISHED ACCESSORIES

- Premium Carrying Case
- Fit Kit: contains soft foam, soft flex and triple flange sleeves plus cleaning tool
- Stereo Adapter Plug - 1/4 in. (6.5mm) to 1/8 in. (3.5mm)

ACCESSORIES

For information about earphone accessories (listed below) and other Shure products visit: www.shure.com

• Replacement Sleeves	• Extension Cable
• Carrying Case	• Push To Hear (PTH Module)
• Adapters	• Volume Control

TECHNICAL SPECIFICATIONS


Transducer type	Single balanced armature
Sensitivity (at 1kHz)	109 dB SPL/mW
Impedance (at 1kHz)	29 Ω
Output connector	Gold-plated 3.5 mm (1/8-inch) stereo plug
Cable length	GR -157 cm (62") W -157 cm (62") K -141 cm (56")
Net weight	31 g (1.1 oz.)
Operational temperature	-18° C to 57° C (0° F to 135° F)
Storage temperature	-29° C to 74° C (-20° F to 165° F)

REPLACING THE EARPHONE NOZZLE

Replace the nozzle if it becomes damaged, or if wax buildup cannot be removed using the wax removal loop.

1. Unscrew the retainer ③ from the earphone base ①.
2. Remove the nozzle ②.
3. Slide the retainer ③ over the new nozzle ②.
4. Place the nozzle on the earphone base with the flange ④ aligned with the groove in the base. Tighten the retainer ③.

Be careful when replacing the earphone nozzle. Parts are small and easily lost if dropped.

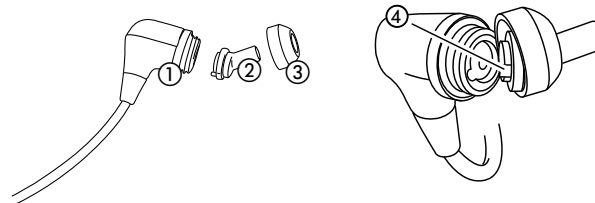

CERTIFICATION

Eligible to bear CE marking.

Conforms to European EMC Directive 89/336/EEC.

Meets applicable tests and performance criteria in European Standard EN 55103 (1996) Parts 1 and 2, for residential (E1) and light industrial (E2) environments.

