



## Removing the Microphone Handle

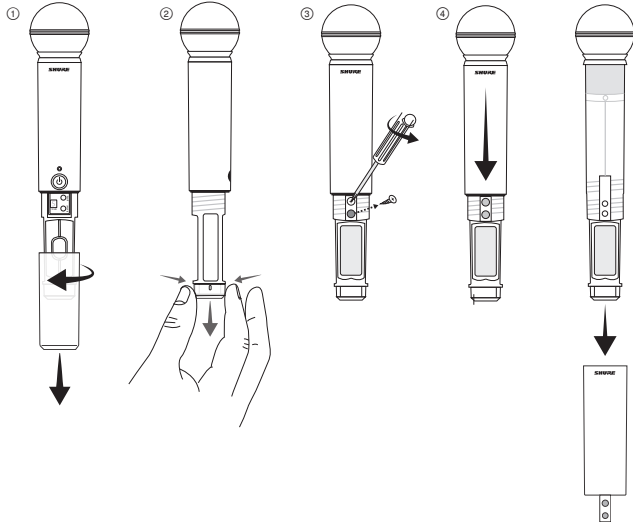

1. Unscrew and remove the battery cover.
2. Squeeze and remove the bottom cap as shown.
3. Use a phillips head screwdriver to remove both screws that hold the cover in place.
4. Remove the cover from the transmitter by sliding it off.

## Installing the Custom Handle

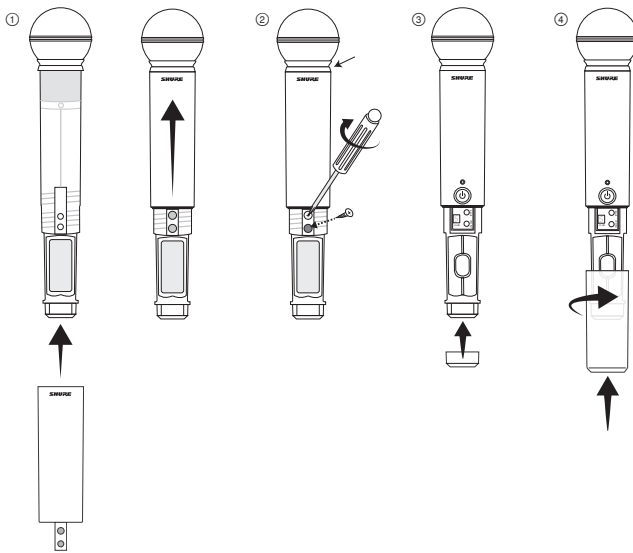

1. Firmly slide the new cover onto the microphone.
2. Install and tighten the two screws.  
**Note:** after installing the screws, tighten the ring below the head (does not apply to PG58 version).
3. Align and install the cap onto the bottom of the microphone.
4. Install the new battery cover on the microphone and rotate to tighten.

**Warning:** Please immediately cease using this custom microphone handle if it becomes cracked, chipped, or otherwise physically damaged.